

Edge Controller

XNC Lite Series

Overview

The XNC Lite Series edge controllers are advanced bus programmable controllers which are part of Advenco LUBAN solutions. The controllers are designed for a wide variety of complex applications, such as cooling, heating, water supply and drainage, lighting, air handling unit and ventilation systems, etc. These devices feature RS485 ports for BACnet™ MS/TP, Modbus RTU.

The controllers continue to perform time-based operations even when disconnected from the system network.



Features

- Delivers high performance with ARM Cortex-M4 32-bit MCU.
- BTL tested BACnet communication on BACnet IP or MS/TP, conforms to BACnet™ Standard ANSI/ASHRAE 135 protocol version 1.20 (ISO 16484-5).
- BACnet Auto-Discovery enables seamless integration of new devices with no manual configuration.
- Adaptable to Open Harmony operating system for diverse market requirements.
- Engineering and commissioning with the XControl tool using graphical function charts.
- Support standard or custom complex applications downloading from XControl.
- Integration of Modbus data points via RTU and / or TCP.
- BLE connection for engineering and commissioning.
- End-of-Line (EOL) switch enables the controller to act as termination device on the communication bus.
- Pluggable terminal blocks for easy installation and maintenance.
- Modern design LED to show the operational status of the controller.
- Standard DIN rail mounting.

Ordering Information

Product Number	Point Capacity (Max)	RS485↑Port	RS485↓Port	Onboard I/O
BAC-3542-100	100	1	1	2UI 6DI 2DO
BAC-3542-460	100	1	1	4UIO 6DI
BAC-3532-081	100	1	1	8UI
BAC-3532-082	100	1	1	6DI 2DO


Remark: RS485↓Port means the connected extension port of the controller.

Product Specification

Processor	ARM Cortex-M4 32-bit
Memory	2MB RAM and 10MB flash memory
Operating System	Open Harmony
Power Requirement	24 VAC±20%, 50/60Hz; 24 VDC (-10%~+20%)
Power Consumption	12 VA (Typical)
Environment	Operating: -4°F to 122°F (-20 to +50 °C); 10 to 90% RH non-condensing Storage: -40°F to 158°F (-40 to +70 °C); 5 to 95% RH non-condensing
Communications Protocol	BACnet MS/TP, Modbus RTU
Terminations	I/O: Pluggable terminal blocks Power Supply & RS485: 2-wire or 3-wire pluggable terminal blocks
Protection	IP20(IEC529)
Housing Material	ABS+PC
Certification	CE, RoHS, REACH, BTL(B-SAC)
Mounting	35mm DIN rail mounting (horizontal orientation)
Dimensions (W×H×D)	120mm ×149mm × 50 mm
Weight	0.45kg

Input/Output	
UI	0-10VDC, 4-20mA, Resistance, Dry contact
AO	0-10VDC, 4-20mA
DO	TRIAC output 24 VAC (requires external power supply)
DI	Dry Contact, Pulse counting (Max.50Hz)
UIO	Input: 0-10VDC, 4-20mA, Resistance, Dry contact Output: 0-10VDC, 4-20mA
UI Resolution	Use a 24-bit analog-to-digital converter
AO Resolution	Use 16-bit resolution

Dimensions (mm)

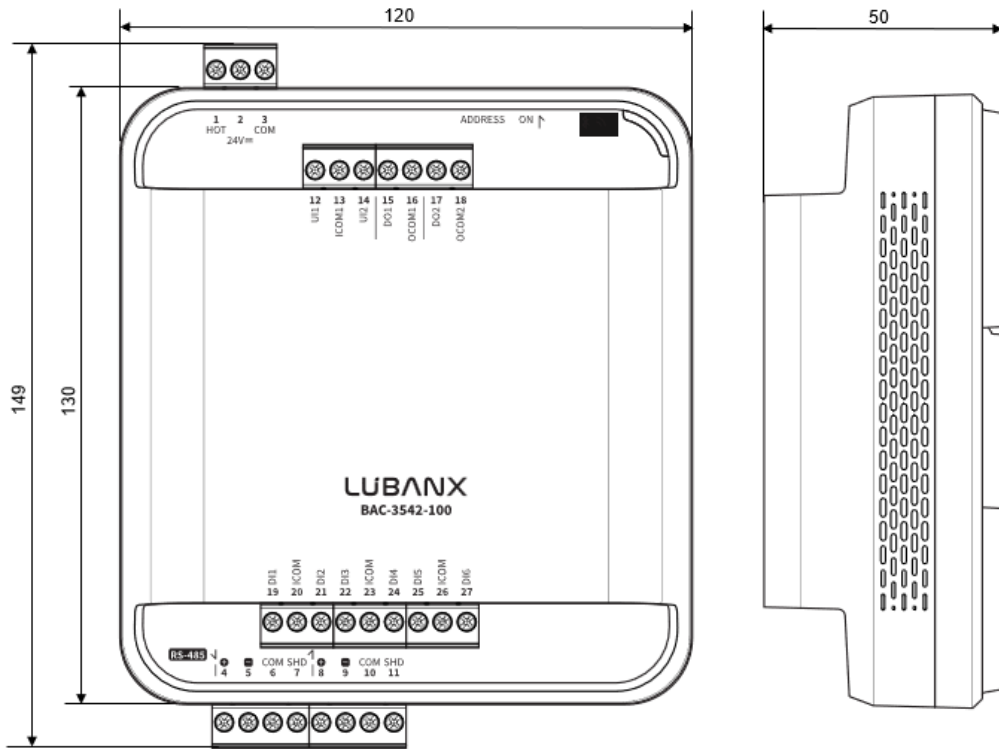

Copy Right @Advenco Technology Co., Ltd.

All specifications herein are current as of the document revision and subject to change without notice.